

## DS-19

## Pedestrian Accommodation: Vehicle Encroachment on Road/Sidewalk

## Multi-Lane Divided

## Mobile Operations

## Intermittent

## Very Short Duration


## Short Duration

## Long Duration

## NOTES

- i) ▲ Location of Pedestrian Controllers if required (e.g., use of Booms or Hoists). Pedestrian passage under Boom is acceptable when Boom is not in motion and when Hoisting is not underway. Where activities at a Work Area could endanger the public (e.g., trenches, excavation), Pedestrian Barricades must be used.

For further detail on Work Zone components, see [Table A \(Mobile/Intermittent/Very Short, pg. 240\)](#).

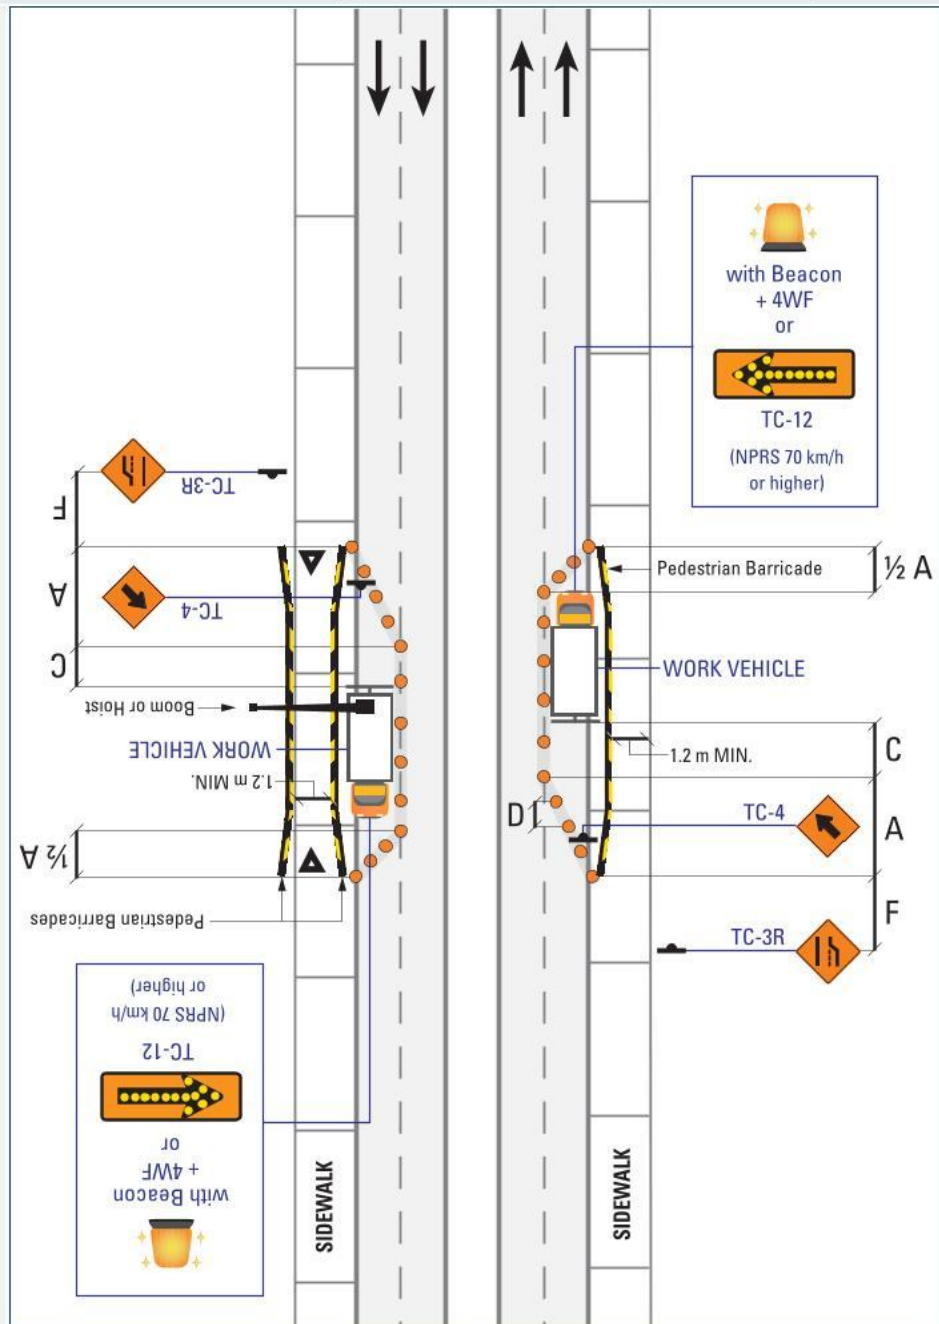

| Label    | Description                             | Normal Posted Regulatory Speed (km/h) |      |     |     |     |
|----------|-----------------------------------------|---------------------------------------|------|-----|-----|-----|
|          |                                         | 50                                    | 60   | 70  | 80  | 90  |
| <b>A</b> | Taper Length for Full Lane Closure (m)  | 60                                    | 85   | 100 | 100 | 110 |
| <b>C</b> | Longitudinal Buffer Area (LBA) (m)      | (30)                                  | (40) | 50  | 60  | 75  |
| <b>D</b> | Maximum Distance between Markers (m)    | 6                                     | 6    | 9   | 9   | 12  |
|          | Minimum Number of Markers for Taper     | 4                                     | 5    | 5   | 7   | 8   |
| <b>F</b> | Distance between Construction Signs (m) | 30                                    | 30   | 60  | 60  | 80  |